



square profile



round profile



create shapes with geo-connectors




.25m, .5m, and 1m



easy snap connections




side label contains specific fixture information

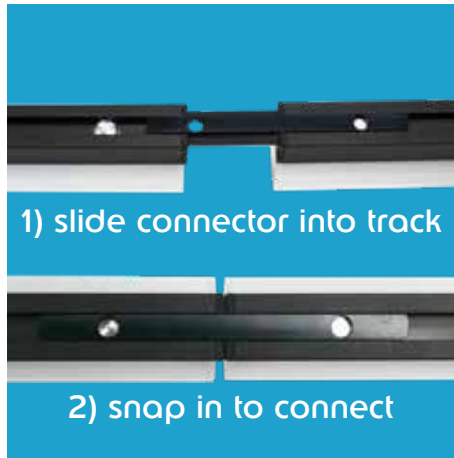

1) slide connector into track

2) snap in to connect

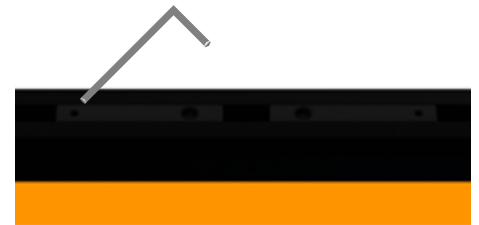

Use hex key to adjust M6 screw-mounts

specs

working voltage: DC24V
max power: 4-13W
beam angle round: 330
beam angle square: 270
ip grade: IP65
led type: 5050 RGB

led quantity: 64/m
pixel quantity: 64/m
color: 8 bit
channel: RGB
channel quantity: 192/m
weight: 56 KG/1.2 Lbs (1m)